

Super Giant Off the Road Rim

SGOR[®]

Super Giant Off the Road Rim

SGOR[®]

TOPY INDUSTRIES, LIMITED

2-3-1 Ohgami, Ayase-shi Kanagawa-ken 252-1104, Japan
Phone: 81-467-78-9611 Fax: 81-467-78-9609

E-mail: rims@topy.co.jp

www.topy.co.jp/

TOPY AMERICA, INC.

OTR DIVISION

1200 Mark Street, Elk Grove Village, IL60007 U.S.A.

Phone: 1-847-439-4420 Fax: 1-847-439-4476

E-mail: sales@topywheels.com

www.topyamerica.com/otr-wheels

WESTERN SALES OFFICE

25 Pacific Avenue, North Salt Lake City, UT 84054

Phone : 1-801-292-6620

VERSION2 2017/09 1000




Super Giant Off the Road Rim
SGOR

TABLE OF CONTENTS

CONTENTS	APPLICABLE MACHINE	PAGE
63 EUW(WTR)TYPE SGOR EARTHMOVER RIM [35 DEGREE]	LARGE DUMP TRUCKS	2
63 EU TYPE SGOR EARTHMOVER RIM [45 DEGREE]	LARGE DUMP TRUCKS	2
EU TYPE SGOR EARTHMOVER RIM [45 DEGREE]	LARGE DUMP TRUCKS & WHEEL LOADERS	3
EUW(WTR) STS TYPE SGOR EARTHMOVER RIM FOR 63 INCH [35 DEGREE]	LARGE DUMP TRUCKS	4
STS TYPE SGOR EARTHMOVER RIM [45 DEGREE]	LARGE DUMP TRUCKS	4
EUW(WTR) ETS TYPE SGOR EARTHMOVER RIM FOR 63 INCH [35 DEGREE]	LARGE DUMP TRUCKS	5
ETS TYPE SGOR EARTHMOVER RIM [45 DEGREE]	LARGE DUMP TRUCKS	5
ES TYPE SGOR TRUCK RIM [35 DEGREE]	LARGE DUMP TRUCKS	6
EUD TYPE SGOR TRUCK RIM [45 DEGREE]	LARGE DUMP TRUCKS & LOADERS	7
EVR TYPE SGOR EARTHMOVER RIM	DUMP TRUCKS	8
EVH TYPE SGOR EARTHMOVER RIM	DUMP TRUCKS	8
EV TYPE SGOR EARTHMOVER RIM	DUMP TRUCKS & LOAD HAUL DUMPS	9
EMR TYPE SGOR EARTHMOVER RIM [45 DEGREE]	WHEEL LOADERS & WHEEL DOZERS	9
ES TYPE SGOR EARTHMOVER RIM [35 DEGREE]	WHEEL LOADERS & WHEEL DOZERS	10
EMH TYPE SGOR EARTHMOVER RIM [45 DEGREE]	WHEEL LOADERS, WHEEL DOZERS, LOAD HAUL DUMPS & INDUSTRIAL VEHICLE	10
EM(D) TYPE SW EARTHMOVER RIM [45 DEGREE]	WHEEL LOADERS, WHEEL DOZERS, INDUSTRIAL & FORESTRY	11
GR TYPE SW EARTHMOVER RIM	GRADERS, WHEEL LOADERS, HAULERS & FORESTRY	11
WI TYPE SW EARTHMOVER RIM (TUBE TYPE)	GRADERS, WHEEL LOADERS, INDUSTRIAL & FORESTRY	12
WI TYPE SW EARTHMOVER RIM (TUBE LESS TYPE)	GRADERS, WHEEL LOADERS, INDUSTRIAL & FORESTRY	12
REINFORCED RIM SW EARTHMOVER RIM	INDUSTRIAL & FORESTRY	12
SGOR/SW SIDE RING		13
SGOR/SW BEAD SEAT BAND		14
SGOR/SW LOCK RING		15
SGOR/SW KEY		16
CAUTION		17

63 EUW(WTR)TYPE SGOR EARTHMOVER RIM [35 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS

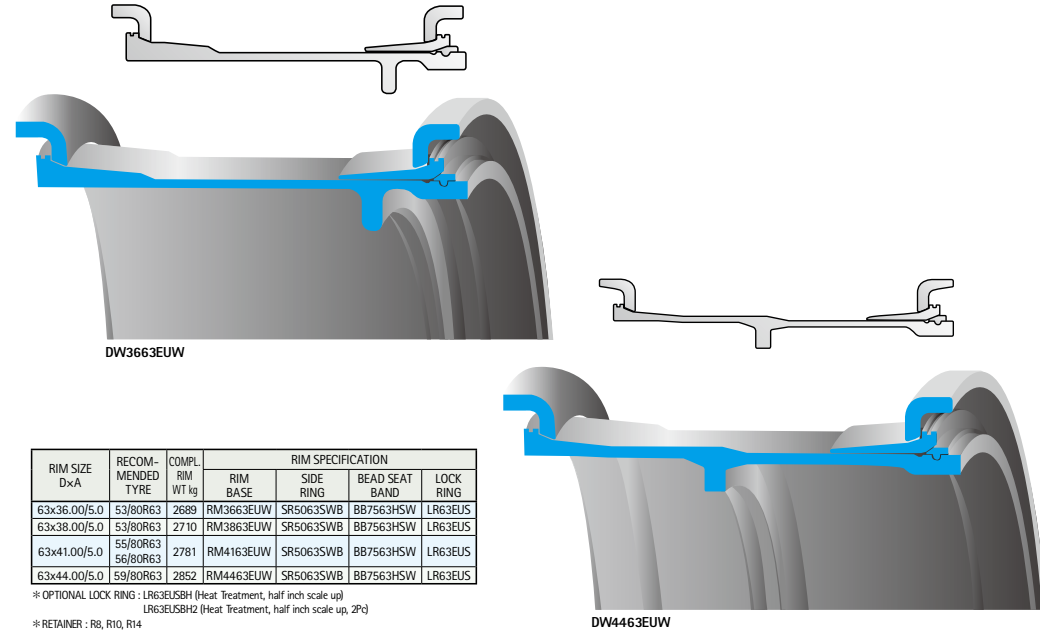


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
63x36.00/5.0	53/80R63	2689	RM3663EUW	SR5063SWB	BB7563HSW	LR63EUS
63x38.00/5.0	53/80R63	2710	RM3863EUW	SR5063SWB	BB7563HSW	LR63EUS
63x41.00/5.0	55/80R63 56/80R63	2781	RM4163EUW	SR5063SWB	BB7563HSW	LR63EUS
63x44.00/5.0	59/80R63	2852	RM4463EUW	SR5063SWB	BB7563HSW	LR63EUS

* OPTIONAL LOCK RING : LR63EUSBH (Heat Treatment, half inch scale up)
 LR63EUSBH2 (Heat Treatment, half inch scale up, 2Pc)
 * RETAINER : R8, R10, R14

63 EU TYPE SGOR EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS

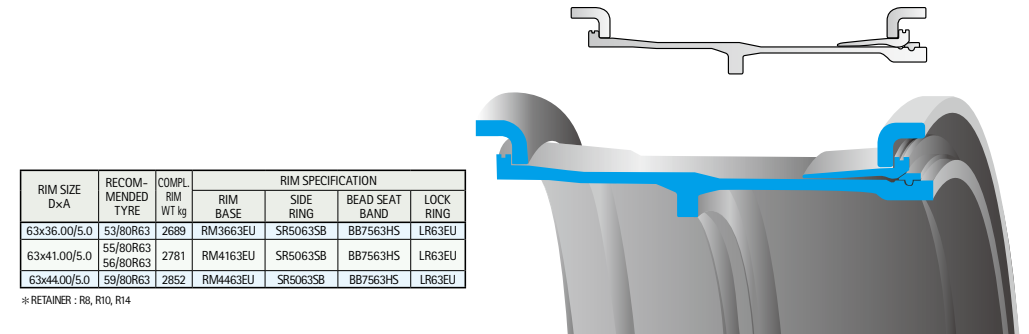


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
63x36.00/5.0	53/80R63	2689	RM3663EU	SR5063SB	BB7563HS	LR63EU
63x41.00/5.0	55/80R63 56/80R63	2781	RM4163EU	SR5063SB	BB7563HS	LR63EU
63x44.00/5.0	59/80R63	2852	RM4463EU	SR5063SB	BB7563HS	LR63EU

* RETAINER : R8, R10, R14

EU TYPE SGOR EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS & WHEEL LOADERS

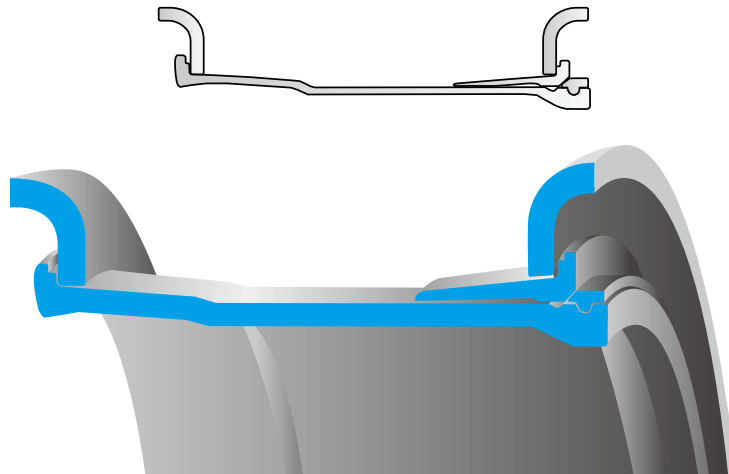


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
51x22.00/4.5	30.00-51 30.00R51	910	RM2251EUHS	SR4551	BB7551HS	LR51EU
51x24.00/5.0	33.00-51 33.00R51	975	RM2451EUHS	SR5051	BB7551HS	LR51EU
51x26.00/5.0	36.00-51 36.00R51	1004	RM2651EUHS	SR5051	BB7551HS	LR51EU
51x40.00/4.5	50/65-51 50/65R51	1155	RM4051EUHS	SR4551	B7551HS	LR51EU
57x27.00/6.0	37.00R57 42/90R57	1302	RM2757EUHS	SR6057AS	BB7557HS	LR57EU
57x29.00/6.0	40.00-57 40.00R57 42/90R57 46/90R57 37.00R57	1330	RM2957EUHS	SR6057AS	BB7557HS	LR57EU
57x32.00/6.0	46/90R57 40.00R57	1429	RM3257EUHS	SR6057AS	BB7557HS	LR57EU
57x32.00/6.5	50/90R57	1519	RM3257EUHS	SR6557AS	BB7557HS	LR57EU
57x34.00/5.0	50/80R57	1415	RM3457EUHS	SR6057HSA	BB7557HS	LR57EU
57x36.00/6.0	49.5-57 50/80-57 52/80-57	1518	RM3657EUHS	SR6057AS	BB7557HS	LR57EU
57x44.00/5.0	55/80R57	1609	RM4457EUHS	SR6057HSA	BB7557HS	LR57EU
57x44.00/6.0	53.5/85-57 55.5/80R57	1651	RM4457EUHS	SR6057AS	BB7557HS	LR57EU
57x4700/5.0	60/80R57	1657	RM4757EUHS	SR6057HAS	BB7557HS	LR57EU
57x4700/6.0	58/85-57 60/80R57	1699	RM4757EUHS	SR6057AS	BB7557HS	LR57EU
57x52.00/6.0	65/65-57	1828	RM5257EUHS	SR6057AS	BB7557HS	LR57EU
57x60.00/6.0	70/70-57	2959	RM6057EUHS	SR6057AS	BB7557HS	LR57EU

* OPTIONAL BEAD SEAT BAND (For 57 inch) : BB7557HS45 MACHINING CONTACT SURFACE 45 DEGREE
 * OPTIONAL LOCK RING (For 57 inch) : LR57EUH (Heat Treatment), LR57EUH2(Heat Treatment, 2P)
 (For 51 inch) : LR51EUH (Heat Treatment)
 * OPTIONAL SIDE RING (For 51 inch) : SR5051H (Reinforce)
 * RETAINER : R8, R10, R14

EUW(WTR) STS TYPE SGOR EARTHMOVER RIM FOR 63 INCH [35 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS

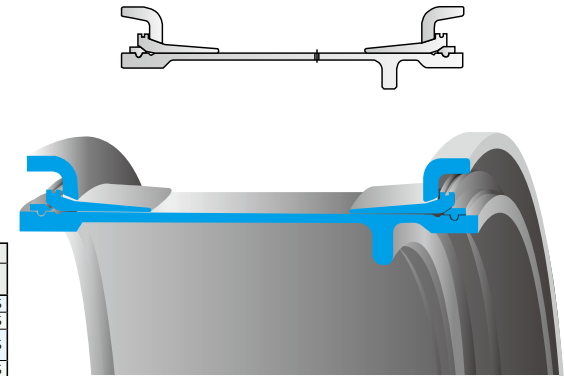

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
63x36.00/5.0	53/80R63	2867	RM3663EUW STS	SR5063SWB	BB7563HSW	LR63EUS
63x38.00/5.0	53/80R63	2905	RM3863EUW STS	SR5063SWB	BB7563HSW	LR63EUS
63x41.00/5.0	55/80R63 56/80R63	2976	RM4163EUW STS	SR5063SWB	BB7563HSW	LR63EUS
63x44.00/5.0	59/80R63	3080	RM4463EUW STS	SR5063SWB	BB7563HSW	LR63EUS

* OPTIONAL LOCK RING : LR63EUSBH (Heat Treatment, half inch scale up)
 LR63EUSBH2 (Heat Treatment, half inch scale up, 2P)
 * RETAINER : R8, R10, R14

STS TYPE SGOR EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS


EVR and EU TYPE SGOR EARTHMOVER RIM [45 DEGREE]

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
49x19.50/4.0	27.00-49 27.00R49 31/90R49	683	RM1949EVR STS	SR4049 or SR4049N	BB5549EVA5A	LR49EVH
51x22.00/4.5	30.00-51 30.00R51	1120	RM2251EU STS	SR4551	BB7551HS	LR51EU
51x24.00/5.0	33.00-51 33.00R51	1252	RM2451EU STS	SR5051	BB7551HS	LR51EU
51x26.00/5.0	36.00-51 36.00R51	1302	RM2651EU STS	SR5051	BB7551HS	LR51EU
57x27.00/6.0	37.00R57 42/90R57	1561	RM2757EU STS	SR6057AS	BB7557HS	LR57EU
57x29.00/6.0	40.00-57 40.00R57 42/90R57 46/90R57 37.00R57	1589	RM2957EU STS	SR6057AS	BB7557HS	LR57EU
57x32.00/6.0	46/90R57 40.00R57	1689	RM3257EU STS	SR6057AS	BB7557HS	LR57EU
57x32.00/6.5	50/90R57	1765	RM3257EU STS	SR6557S	BB7557HS	LR57EU
57x34.00/5.0	50/80R57	1668	RM3457EU STS	SR5057HSA	BB7557HS	LR57EU

* OPTIONAL DESIGN : 35 Degree Bead Seat Band and Lock ring (ES type)
 * OPTIONAL BEAD SEAT BAND (For 57 inch) : BB7557HS45 Machined contact surface 45 degree
 * OPTIONAL LOCK RING (For 57 inch) : LR57EUH (Heat Treatment), LR57EUH2(Heat Treatment, 2P)
 (For 51 inch) : LR51EUH (Heat Treatment)
 * OPTIONAL SIDE RING (For 51 inch) : SR5051H (Reinforce)
 * RETAINER : R8, R10, R14

EUW(WTR) ETS TYPE SGOR EARTHMOVER RIM FOR 63 INCH [35 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS

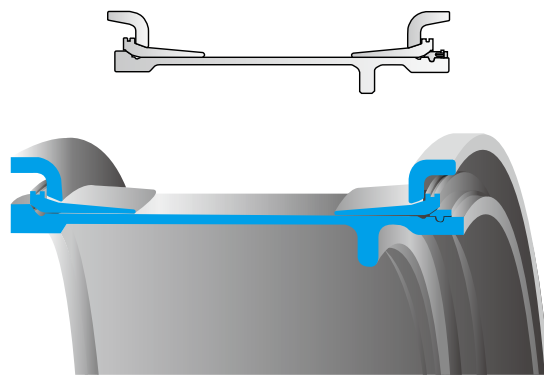


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
63x36.00/5.0	53/80R63	2798	RM3663EUW ETS	SR5063SWB	BB7563HSW	LR63EUS
63x38.00/5.0	53/80R63	2819	RM3863EUW ETS	SR5063SWB	BB7563HSW	LR63EUS
63x41.00/5.0	55/80R63 56/80R63	2890	RM4163EUW ETS	SR5063SWB	BB7563HSW	LR63EUS
63x44.00/5.0	59/80R63	2961	RM4463EUW ETS	SR5063SWB	BB7563HSW	LR63EUS

* OPTIONAL LOCK RING : LR63EUSBH (Heat Treatment, half inch scale up)
LR63EUSBH2 (Heat Treatment, half inch scale up, 2P)

* RETAINER : R8, R10, R14


ES TYPE SGOR TRUCK RIM [35 DEGREE]

APPLICABLE MACHINE : LARGE DUMP TRUCKS

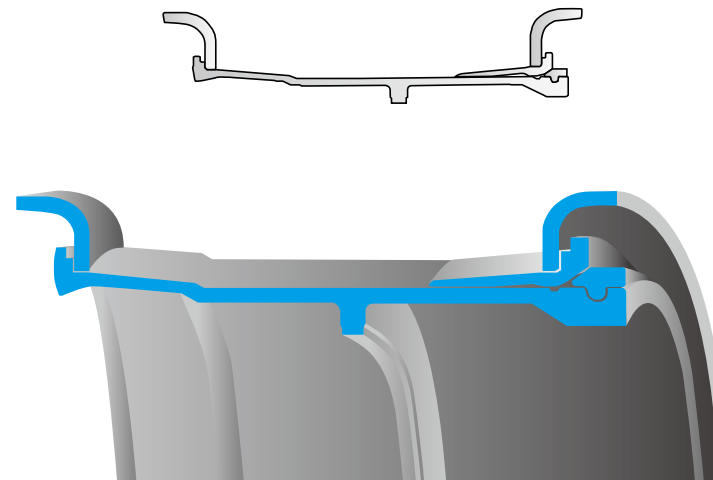

ETS TYPE SGOR EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : LARGE DUMP TRUCKS

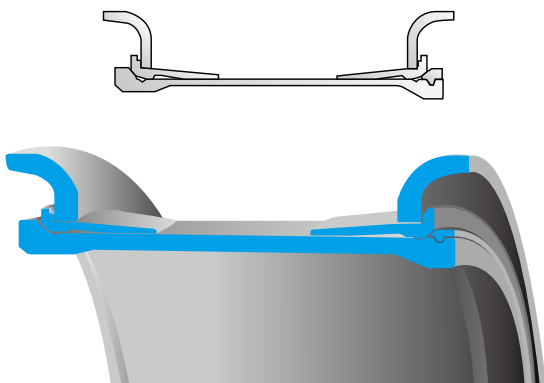

EVR and EU TYPE SGOR EARTHMOVER RIM [45 DEGREE]

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
57x27.00/6.0	37.00R57	1626	RM2757EU ETS	SR6057AS	BB7557HS	LR57EU
	42/90R57					
57x29.00/6.0	40.00-57	1658	RM2957EU ETS	SR6057AS	BB7557HS	LR57EU
	40.00R57					
	42/90R57					
	46/90R57 37.00R57					
57x32.00/6.0	46/90R57	1720	RM3257EU ETS	SR6057AS	BB7557HS	LR57EU
	40.00R57					
57x32.00/6.5	50/90R57	1796	RM3257EU ETS	SR6557S	BB7557HS	LR57EU
57x34.00/5.0	50/80R57	1740	RM3457EU ETS	SR5057AS	BB7557HS	LR57EU

* OPTIONAL DESIGN : 35 Degrees Bead Seat Band(BB7557ES) and Lock ring (LR57ES)

* OPTIONAL BEAD SEAT BAND : BB7557HS45 (Machined contact surface 45 degree)

* OPTIONAL LOCK RING (For 57 inch) : LR57EJH (Heat Treatment), LR57EJH2(Heat Treatment, 2P)
(For 51 inch) LR57EJH (Heat Treatment)

* OPTIONAL SIDE RING (For 51 inch) : SR5057H (Reinforce)

* RETAINER : R8, R10, R14


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
57x27.00/6.0	37.00R57	1302	RM2757EU ETS	SR6057AS	BB7557ES35	LR57EUS
	42/90R57					
57x29.00/6.0	40.00-57	1330	RM2957EU ETS	SR6057AS	BB7557ES35	LR57EUS
	40.00R57					
	42/90R57					
	46/90R57 37.00R57					
57x32.00/6.0	46/90R57 40.00R57	1429	RM3257EU ETS	SR6057AS	BB7557ES35	LR57EUS
57x32.00/6.5	50/90R57	1519	RM3257EU ETS	SR6557AS	BB7557ES35	LR57EUS
57x34.00/5.0	50/80R57	1415	RM3457EU ETS	SR5057AS	BB7557ES35	LR57EUS

* OPTIONAL LOCK RING : LR57EJSH (Heat Treatment), LR57EJSH2 (Heat Treatment, 2P)

* RETAINER : R8, R10, R14

EUD TYPE SGOR TRUCK RIM [45 DEGREE]

APPLICABLE MACHINE : LARGE DUMP TRUCKS & LOADERS

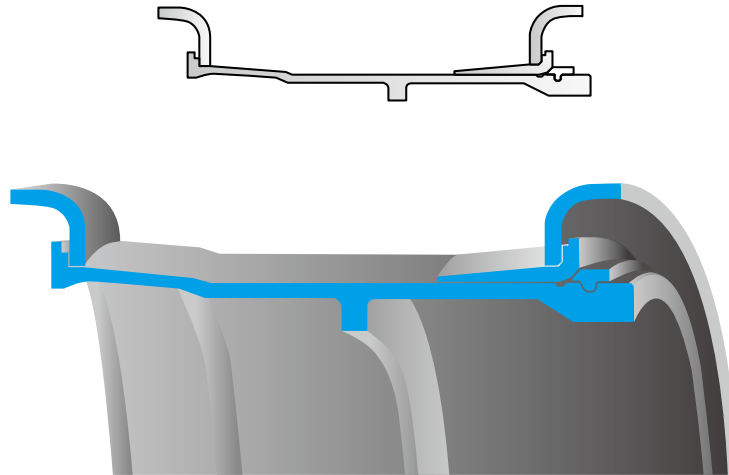


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
57x27.00/6.0	37.00R57	1346	RM2757EUD	SR6057AS	BB7557HS	LR57EU
	42.90R57					
57x29.00/6.0	40.00-57	1374	RM2957EUD	SR6057AS	BB7557HS	LR57EU
	40.00R57					
	42.90R57					
	46.90R57					
57x32.00/6.0	46.90R57	1473	RM3257EUD	SR6057AS	BB7557HS	LR57EU
	40.00R57					
57x32.00/6.5	50.90R57	1563	RM3257EUD	SR6557AS	BB7557HS	LR57EU
57x34.00/5.0	50.80R57	1459	RM3457EUD	SR5057AS	BB7557HS	LR57EU
57x36.00/6.0	49.5-57	1562	RM3657EUD	SR6057AS	BB7557HS	LR57EU
	50.80-57					
57x44.00/5.0	55.80R57	1653	RM4457EUD	SR5057AS	BB7557HS	LR57EU
	40.00R57					
57x44.00/6.0	53.5/85-57	1695	RM4457EUD	SR6057AS	BB7557HS	LR57EU
	55.5/80R57					
57x47.00/5.0	60.80R57	1701	RM4757EUD	SR5057HSA	BB7557HS	LR57EU
57x47.00/6.0	58/85-57	1743	RM4757EUD	SR6057AS	BB7557HS	LR57EU
	60.80R57					
57x52.00/6.0	65/65-57	1872	RM5257EUD	SR6057AS	BB7557HS	LR57EU
57x60.00/6.0	70/70-57	2003	RM6057EUD	SR6057AS	BB7557HS	LR57EU

* OPTIONAL LOCK RING : LR57EUSH (Heat Treatment), LR57EUSH2 (Heat Treatment, 2pc)
LR57ELHR10 (Heat Treatment with R10 retainer),
LR57ELZR14 (2Pc with R14 retainer)

* STS (Double Gutter) IS AVAILABLE
* 35 DEGREE BEAD SEAT BAND AND LOCK RING IS ALSO AVAILABLE
* RETAINER : R8, R10, R14

EVR TYPE SGOR EARTHMOVER RIM


APPLICABLE MACHINES : DUMP TRUCKS

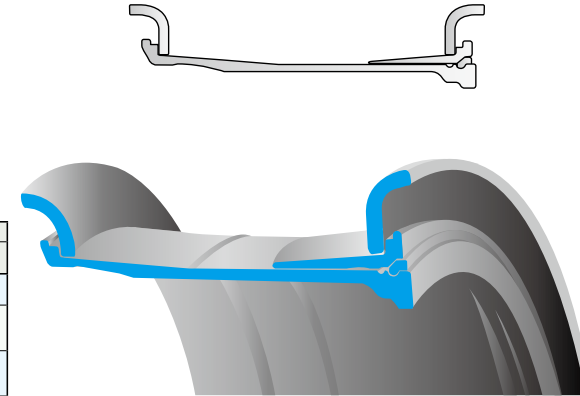

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
49x17.00/3.5	24.00-49	536	RM1749EVR	SR3549	BB5549EV	LR49EV
	24.00R49					
49x19.50/4.0	27.00-49	587	RM1949EVR	SR4049	BB5549EV	LR49EV
	27.00R49					
	31.90R49					
49x19.50/4.0	27.00-49	603	RM1949EVR	SR4049H	BB5549EV	LR49EV
	27.00R49					
	31.90R49					

EVH TYPE SGOR EARTHMOVER RIM

APPLICABLE MACHINES : DUMP TRUCKS

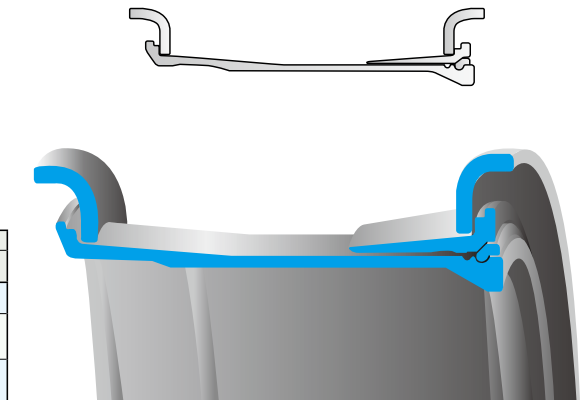


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
49x17.00/3.5	24.00-49	532	RM1749EVH	SR3549	BB5549EV	LR49EV
	24.00R49					
49x19.50/4.0	27.00-49	583	RM1949EVH	SR4049	BB5549EV	LR49EV
	27.00R49					
	31.90R49					
49x19.50/4.0	27.00-49	599	RM1949EVH	SR4049H	BB5549EV	LR49EV
	27.00R49					
	31.90R49					

EV TYPE SGOR EARTHMOVER RIM

APPLICABLE MACHINES : DUMP TRUCKS & LOAD HAUL DUMPS


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
33x13.00/2.5	18.00-33 18.00R33 21/90R33	258	RM1333EV	SR2533	BB5533EV	LR33EV
33x28.00/3.5	35/65-33 35/65R33 875/65R33 900/65R33	376	RM2833EV	SR3533	BB5533EV	LR33EV
35x15.00/3.0	21.00-35 21.00R35	300	RM1535EV	SR3035	BB5535EV	LR35EV
35x17.00/3.5	24.00-35 24.00R35	335	RM1735EV	SR3535	BB5535EV	LR35EV
49x17.00/3.5	24.00-49 24.00R49	508	RM1749EV	SR3549	BB5549EV	LR49EV
49x19.50/4.0	27.00-49 27.00R49 31/90R49	559	RM1949EV	SR4049	BB5549EV	LR49EV
49x19.50/4.0	27.00-49 27.00R49 31/90R49	575	RM1949EVT	SR4049H	BB5549EV	LR49EV

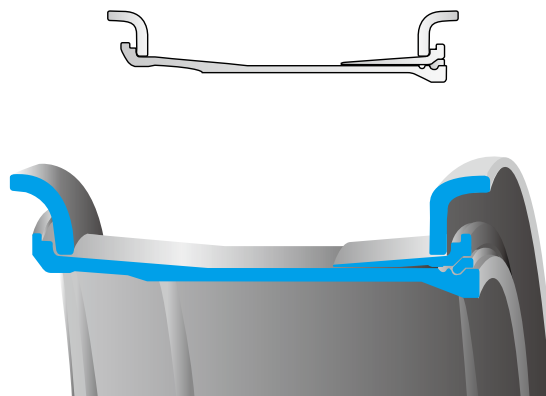

ES TYPE SGOR EARTHMOVER RIM [35 DEGREE]

APPLICABLE MACHINES : WHEEL LOADERS & WHEEL DOZERS

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
39x32.00/4.0	40/65-39 40/65R39	555	RM3239ES	SR4039	BB5539ES	LR39ES
39x32.00/4.5	41.25/70-39 37.5-39 37.5R39 40.5/75R39 45/65R39	604	RM3239ES	SR4539HTK	BB5539ES	LR39ES
45x36.00/4.5	45/65-45 45/65R45 1150/65R45	744	RM3645ES	SR4549HT	BB5545ES	LR45ES
57x52.00/6.0	65/65-57	1856	RM5257EU	SR6057AS	BB1057ES	LR1057ES

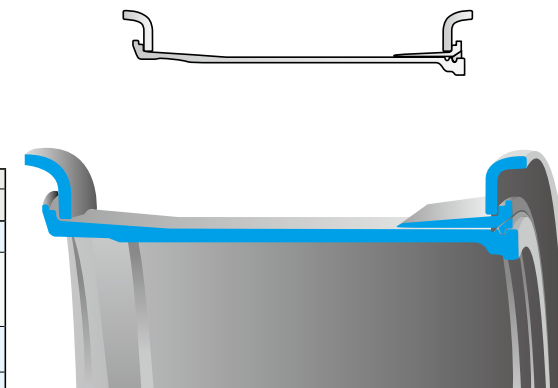


RW3239ESMR, RW3645ESMR

EMR TYPE SGOR EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : WHEEL LOADERS & WHEEL DOZERS


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
39x32.00/4.0	40/65-39 40/65R39	552	RM3239EMR	SR4039	BB5539EV	LR39EM
39x32.00/4.5	41.25/70-39 37.5-39 37.5R39 40.5/75R39 45/65R39	601	RM3239EMR	SR4539HTK	BB5539EV	LR39EM
45x36.00/4.5	45/65-45 45/65R45 1150/65R45	741	RM3645EMR	SR4545HT	BB5545EV	LR45EM

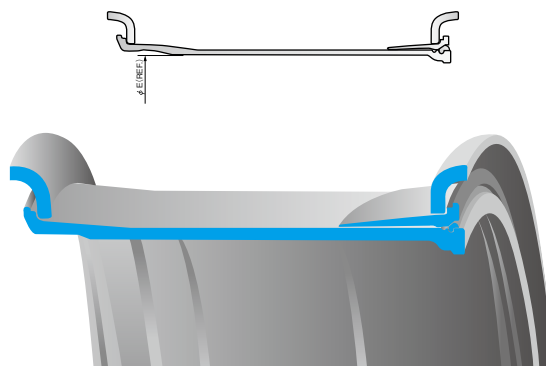

EMH TYPE SGOR EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : WHEEL LOADERS, WHEEL DOZERS, LOAD HAUL DUMPS & INDUSTRIAL VEHICLE


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
29x25.00/3.5	29.5-29 29.5R29 775/65R29	295	RM2529EMH	SR3529	BB5529EM	LR29EM
29x27.00/3.5	33.25-29 33.25R29 875/65R29	315	RM2729EMH	SR3529	BB5529EM	LR29EM
33x13.00/2.5	18.00-33 18.00R33 21/90R33	224	RM1333EMH	SR2533	BB4033EM	LR33EM
33x28.00/3.5	35/65-33 35/65R33 875/65R33 900/65R33	357	RM2833EMH	SR3533	BB5533EM	LR33EM
33x28.00/4.0	33.5-33 33.5R33	395	RM2833EMH	SR4033	BB5533EM	LR33EM

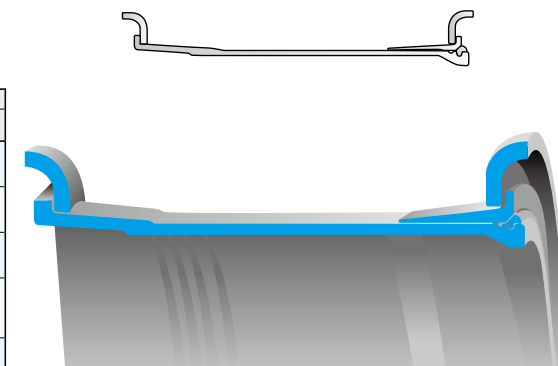

EM(D) TYPE SW EARTHMOVER RIM [45 DEGREE]

APPLICABLE MACHINES : WHEEL LOADERS, WHEEL DOZERS, INDUSTRIAL & FORESTRY

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
25x10.00/1.5	14.00-25 14.00R25 385/95R25	128	RM1025EM(D)	SR1525	BB4025EM(D)	LR25EM(D)
25x11.25/2.0	16.00-25 16.00R25 445/95R25	141	RM1125EM(D)	SR2025	BB4025EM(D)	LR25EM(D)
25x13.00/2.5	18.00-25 18.00R25 505/95R25	168	RM1325EM(D)	SR2525	BB4025EM(D)	LR25EM(D)
25x14.00/2.0	17.5-25	153	RM1425EM(D)	SR2025	BB4025EM(D)	LR25EM(D)
25x15.00/3.0	21.00-25 21.00R25	191	RM1525EM(D)	SR3025	BB4025EM(D)	LR25EM(D)
25x17.00/2.0	20.5-25 20.5R25 525/80R25 550/65R25 600/65R25	167	RM17254EM(D)	SR2025	BB4025EM(D)	LR25EM(D)
25x19.50/2.5	23.5-25 23.5R25 600/65R25 650/65R25 605/80R25	197	RM1925EM(D)	SR2525	BB4025EM(D)	LR25EM(D)
25x22.00/3.0	26.5-25 26.5R25 750/65R25 685/80R25	227	RM2225EM	SR3025	BB5525EM	LR25EM
25x24.00/3.0	30/65R25 750/65R25	236	RM2425EM	SR3025	BB5525EM	LR25EM
25x25.00/3.5	29.5-25 29.5R25 850/65R25	254	RM2525EM	SR3525	BB5525EM	LR25EM
33x13.00/2.5	18.00-33 18.00R33 21/90R33	218	RM1333EM	SR2533	BB5533EM	LR33EM

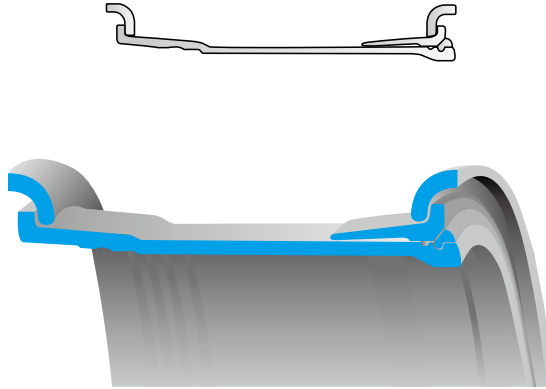


* RIM WITH (D) STANDS FOR LOCK RING DRIVER APPLICATION
* FOR HEAVY DUTY USES SHOULD ADD REINFORCE BAND TO RIM

GR TYPE SW EARTHMOVER RIM

APPLICABLE MACHINES : GRADERS, WHEEL LOADERS, HAULERS & FORESTRY

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION		
			RIM BASE	SIDE RING	LOCK RING
24x8.00TG	10.00R24 12.00-24 12.00R24 13.00-24 13.00R24 14.00-24 14.00R24	37	RM8024TG	SR8024	LR8024
24x10.00VA	13.00-24 13.00R24 14.00-24 14.00R24 16.00-24 16.00R24	68	RM1024VA	SR1024	LR1024
25x10.00/1.5	14.00-25 14.00R25 385/95R25	70	RM1025	SR25-15	LR25GR
25x12.00	15.5-25 15.5R25	48	RM1225	SR1225	LR1225
25x12.00/1.3(A)	15.5-25 15.5R25 395/80R25	77	RM1225A	SR1225A	LR25GR
25x14.00/1.5	17.5-25 17.5R25 22/65R25 445/80R25	82	RM1425	SR25-15	LR25GR
25x17.00/1.7	20.5-25 20.5R25 550/65R25 600/65R25	92	RM1725-1.7	SR1725-1.7	LR25GR

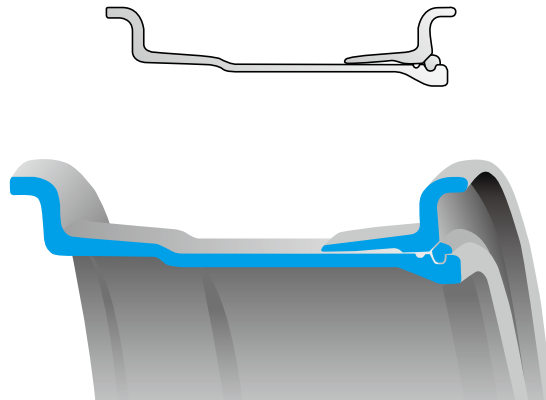


WI TYPE SW EARTHMOVER RIM (TUBE TYPE)

APPLICABLE MACHINES : GRADERS, WHEEL LOADERS, INDUSTRIAL & FORESTRY

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION		
			RIM BASE	SIDE RING	LOCK RING
20x10.00WI	14.00-20 14.00R20	61	RM1020WI	SR20WI	LR20WIA
20x10.00WI(A)	14.00-20 14.00R20	56	RM1020WI(A)	SR20WI	LR20WIA
24x8.50V-W	12.00-24 13.00-24 13.00R24 325/95R24	64	RM8524VW	SRWV24	LR24WIA
24x10.00WI	13.00-24 13.00R24 14.00-24 14.00R24	71	RM1024WI	SR24WI	LR24WIA
24x10.00WI(A)	13.00-24 13.00R24 14.00-24 14.00R24	67	RM1024WI(A)	SR24WI	LR24WIA

* SIDE RING AND LOCK RING ARE NOT INTERCHANGEABLE BETWEEN TUBE AND TUBELESS TYRE.
PLEASE CONFIRM BY STEEL STAMP

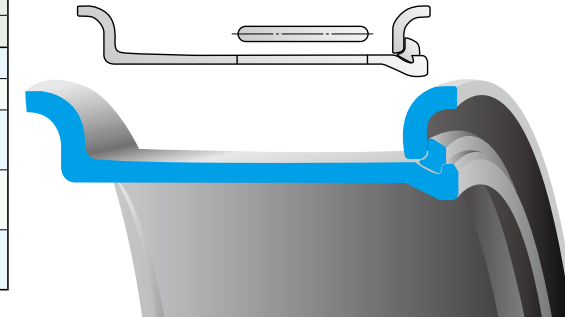


WI TYPE SW EARTHMOVER RIM (TUBELESS TYPE)

APPLICABLE MACHINES : GRADERS, WHEEL LOADERS, INDUSTRIAL & FORESTRY

RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION		
			RIM BASE	SIDE RING	LOCK RING
20x10.00WI-T	14.00-20 14.00R20	63	RM1020WI-T	SR20WI-T	LR20WIA-T
24x10.00WI-T	13.00-24 13.00R24 14.00-24 14.00R24	73	RM1024WI-T	SR24WI-T	LR24WIA-T

* SIDE RING AND LOCK RING ARE NOT INTERCHANGEABLE BETWEEN TUBE AND TUBELESS TYRE.
PLEASE CONFIRM BY STEEL STAMP
* SEAL RING REQUIRE

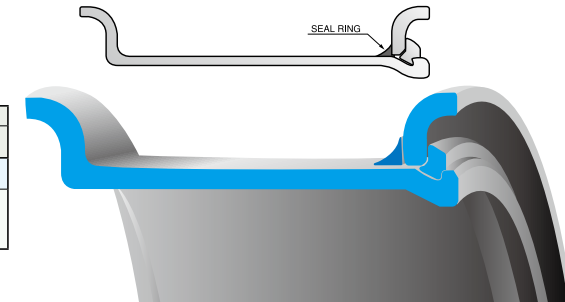


REINFORCED RIM SW EARTHMOVER RIM

APPLICABLE MACHINES : INDUSTRIAL & FORESTRY


RIM SIZE DxA	RECOM- MENDED TYRE	COMPL. RIM WT kg	RIM SPECIFICATION			
			RIM BASE	SIDE RING	BEAD SEAT BAND	LOCK RING
25x11.25/2.0	16.00-25 16.00R25 445/95R25	153	RM1125EM(D)	SR2025	BB4025EM(D)	LR25EM(D)
25x13.00/2.5	18.00-25 18.00R25 505/95R25	180	RM1325EM(D)	SR2525	BB4025EM(D)	LR25EM(D)

* WEIGHT IS FOR REFERENCE

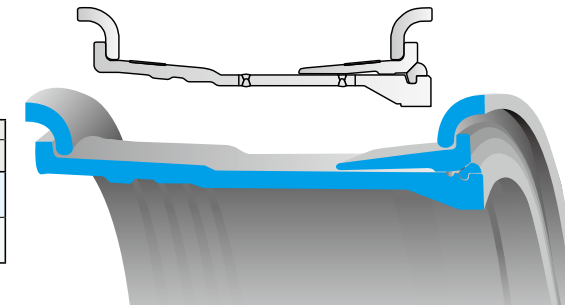


SGOR/SW SIDE RING

WTR(Wedge Type Rim) TYPE SIDE RING




SIDE RING SIZE	DIMENSIONS mm		WEIGHT kg
	B	R	
SR5063SWB	139.7	69.9	361
SR5063SWC	139.7	69.9	345

SGOR SIDE RING




SIDE RING SIZE	DIMENSIONS mm				WEIGHT kg
	A	B	C	R	
SR4039	100.6	75.0	992.6	57.2	75
SR4539HTK	133.3	83.0	992.6	63.5	99
SR4545HT	113.3	83.0	1144.9	63.5	117
SR3549	87.9	70.0	1246.6	50.8	80
SR4049	100.6	75.0	1246.6	57.2	92
SR4049H	100.6	78.0	1246.6	57.2	100
SR4049HI	100.6	78.0	1246.6	57.2	103
SR4049N	100.6	90.0	1246.6	57.2	94
SR4551	113.3	83.0	1297.4	63.5	130
SR5051	126.0	95.0	1297.4	69.9	150
SR5051H	126.0	100.0	1297.0	69.9	181
SR5051N	126.0	110.0	1297.0	69.9	163
SR5057	126.0	100.0	1449.7	70.0	202
SR5057HS	126.0	100.0	1449.7	69.9	202
SR5057HSA	126.0	137.0	1449.7	69.9	231
SR6057AS	151.6	134.0	1449.6	83.8	252
SR6557S	164.2	127.9	1449.7	69.9	296
SR5063SB	126.1	139.7	1602.0	69.9	371

SW SIDE RING




SIDE RING SIZE	DIMENSIONS mm				WEIGHT kg
	A	B	C	R	
SR1525	37.0	30.0	637.0	25.0	9.5
SR2025	50.0	37.0	637.0	32.0	13
SR2525	62.5	50.0	637.0	38.0	22
SR3025	75.0	58.0	637.0	44.5	28
SR3525	88.0	60.0	637.0	51.0	35
SR3529	88.0	60.0	738.6	50.8	37
SR2533	62.5	50.0	840.2	38.0	28
SR3033	75.0	58.0	840.2	44.5	34
SR3533	88.0	60.0	840.2	51.0	40
SR3035	75.0	58.0	890.9	44.5	36
SR3535	88.0	60.0	890.9	50.8	44

GR SIDE RING




SIDE RING SIZE	DIMENSIONS mm				WEIGHT kg
	A	B	C	R	
SR8024	36.0	24.5	614.4	16.5	8
SR1024	43.0	30.0	614.4	23.0	18
SR1225	33.0	26.0	635.0	23.0	9
SR25-1.5	38.0	40.0	635.0	23.0	19
SR1725-1.7	43.0	25.5	635.0	23.0	19

TR SIDE RING



SIDE RING SIZE	DIMENSIONS mm				WEIGHT kg
	A	B	C	R	
SR20TG	36.0	21.0	512.8	16.5	8

WI TYPE SIDE RING FOR TUBE TYRES AND TUBELESS TYRES




TYRES	SIDE RING SIZE	DIMENSIONS mm				WEIGHT kg
		A	B	C	R	
TUBE TYRES	SR20WI	49.0	35.0	511.0	29.0	9
TUBELESS TYRES	SR20WI-T	50.2		509.6	11	
TUBE TYRES	SRW-Vx24	43.0	33.0	612.6	27.0	11
TUBE TYRES	SR24WI	49.0	35.0	612.6	29.0	11
TUBELESS TYRES	SR24WI-T	50.2		611.2	13	

NOTE: 1) SIDE RING FOR TUBE TYRES AND THAT FOR TUBELESS TYRES ARE NOT INTERCHANGEABLE.


SGOR/SW BEAD SEAT BAND

HSW(WTR) BEAD SEAT BAND




BEAD SEAT BAND SIZE	DIMENSIONS mm			WEIGHT kg
	A	B	C	
BB7563HSW	246.0	39.0	1600.2	316
BB7563HSWI	246.0	39.0	1600.2	316
BB7563HSWA	246.0	39.0	1600.2	316
BB7563HSWA	246.0	39.0	1600.2	246
BB7563HSWCA	247.5	39.0	1600.2	246

SGOR BEAD SEAT BAND (45 DEGREE)




BEAD SEAT BAND SIZE	DIMENSIONS mm			WEIGHT kg
	A	B	C	
BB5539EV	158.5	28.6	990.6	59
BB5545EV	158.5	28.6	1143	68
BB5549EV	158.5	28.6	1244.6	71
BB7551HS	222.2	28.6	1295.4	140
BB7551HS4SA	222.2	28.6	1295.4	140
BB7557HS	222.2	28.6	1447.8	150
BB7557HSA	222.2	28.6	1447.8	150
BB7557HSF	222.2	28.6	1447.8	150
BB7557HS45	222.2	28.6	1447.8	150
BB7557HS45P	222.2	28.6	1447.8	150
BB7563HS	243.0	41.0	1600.2	297

SGOR BEAD SEAT BAND ES (35 DEGREE)




BEAD SEAT BAND SIZE	DIMENSIONS mm			WEIGHT kg
	A	B	C	
BB5539ES	158.5	28.6	990.6	58
BB5545ES	158.5	28.6	1143	68
BB7557ES35	222.2	28.6	1447.8	150
BB1057ES	285.3	43.5	1447.8	239

SW BEAD SEAT BAND



BEAD SEAT BAND SIZE	DIMENSIONS mm			WEIGHT kg
	A	B	C	
BB4025EM	127.0	14.3	635.0	27
BB4025EMD	127.0	14.3	635.0	25
BB5525EM	160.3	14.3	635.0	32
BB5529EM	160.3	14.3	736.6	35
BB4033EM	127.0	14.3	838.2	34
BB5533EV	158.5	28.6	838.2	47
BB5539EV	158.5	28.6	889.0	51




MMP RING

For your safety, add safety ring to bead seat band (3 Pc type add to sidering) prevents fill an air when lock ring is not fitted correctly or bad fitting.

SGOR/SW LOCK RING


EUS TYPE LOCK RING



LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR63EUS	58.7	14.0	48
LR63EUSB	58.7	14.0	51
LR63EUSH	58.7	14.0	48
LR63EUS2	58.7	14.0	48
LR63EUS2	58.7	14.0	48
LR63EUSBH	58.7	14.0	51
LR63EUSB2	58.7	14.0	48
LR63EUSBH2	58.7	14.0	48


*2 is for 2 Pc Lock Ring

EV TYPE LOCK RING




LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR33EV	28.3	9.7	8
LR35EV	28.3	9.7	8
LR49EV	28.3	9.7	12
LR49EVH	28.3	9.7	11.5

KEY



KEY	DIMENSIONS mm		WEIGHT kg
	A	B	
FK-1	73.0	60.5	0.6
FK-7	73.8	61.0	0.8
SK-1	100.0	74.5	1.3
MK-45K	149.2	78.6	2.3
MK-45	149.2	78.6	2.3
MK-57A	162.4	90.5	2.9
MK-57B	162.4	90.5	4.0


EU TYPE LOCK RING



LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR51EU	58.7	14.0	39
LR51EU2	58.7	14.0	36
LR57EU	58.7	14.0	44
LR57EU2	58.7	14.0	44
LR57EUH	58.7	14.0	44
LR57EUHR10	58.7	14.0	44
LR57EU2R14	58.7	14.0	44
LR63EU	58.7	14.0	48


*2 is for 2 Pc Lock Ring

EM TYPE LOCK RING




LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR25EM(D)	25.0	8.7	5
LR29EM	25.0	8.7	7
LR33EM	25.0	8.7	7
LR35EM	25.0	8.7	8
LR39EM	25.0	8.7	8
LR45EM	25.0	8.7	10

EUS TYPE LOCK RING (35 DEGREE)




LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR57EUS (35 DEGREE)	58.7	14.0	46
LR57EUSHR10(35 DEGREE)	58.7	14.0	46

GR TYPE LOCK RING




LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR1024	14.7	5.6	2
LR8024	14.7	5.6	2
LR25GR	14.7	5.6	2
LR1225	14.7	5.6	2

ES TYPE LOCK RING (35 DEGREE)



LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
	A	B	
LR39ES	28.5	8.7	12
LR45ES	28.5	8.7	13
LR105YES	58.7	14.0	48

WI TYPE LOCK RING



TYRES	LOCK RING SIZE	DIMENSIONS mm		WEIGHT kg
		A	B	
TUBE TYRES	LR20WIA	21.0	7.2	4
TUBELESS TYRES	LR20WIA-T	19.5	7.2	4
TUBE TYRES	LR24WIA	21.0	7.2	5
TUBELESS TYRES	LR24WIA-T	19.5	7.2	5



WARNING

- Read safety precautions in RIM Instruction Manual before handling Topy Rim. Failure to follow safety precautions, especially those involving different size rims, could result in serious injury or death.
- If manual is missing, get replacement at www.topy.co.jp/.

TOPY, supporting your vehicle with respect !!!

TOPY is the world's leading company for construction and mining wheels. We are supported by great customers in both Original Equipment and after market all around the world.

Many trucks are operating at very strict conditions.

TOPY's experience and design technology has developed optimum rims to meet to our customers request in every condition.

We keep on making high customer satisfaction providing valuable, high performance and safe products.

For more information, contact to TOPY distributor or TOPY customer service.

